


Mechanical Drawing

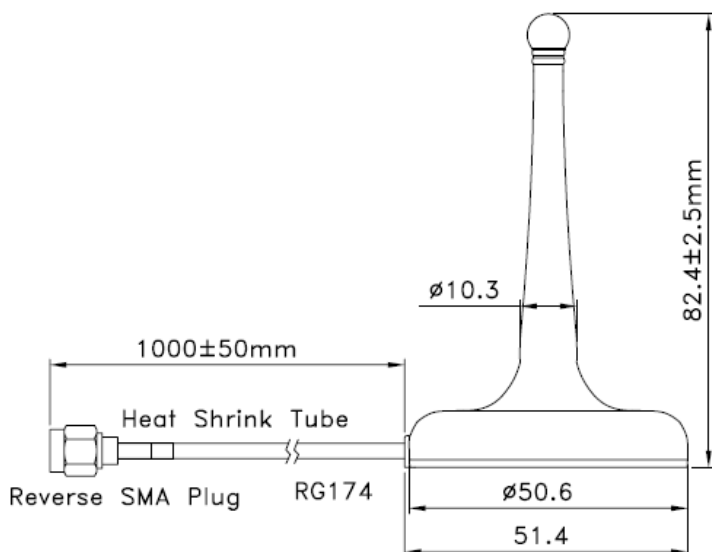

Unit: mm

Electrical Specification

Frequency Range	2.4~2.4835GHz
Impedance	50Ω
V.S.W.R.	≤ 2.0
Radiation	Omni
Gain	2dBi
Polarization	Vertical

Mechanical Specification

Connector Type	Reverse SMA Plug (Brass)
Material	PU/ABS
Cable	RG174 (1000mm)
Bushing Type	--
Length	82.4mm
Water Proof	--
Weight	31g (est.)

Environmental Specification

Operating Temp	- 20°C ~ + 65°C
Storage Temp	- 30°C ~ + 70°C
Substance	Meet RoHs requirement

