


Mechanical Drawing

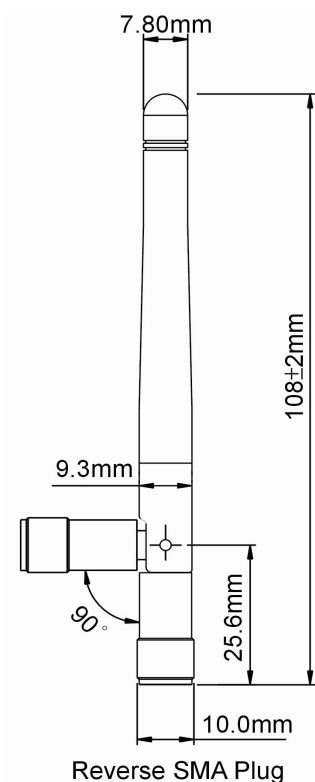

Unit: mm

Electrical Specification

Frequency Range	2.4~2.4835GHz
Impedance	50Ω
V.S.W.R.	≤ 2.0
Radiation	Omni
Gain	2dBi
Polarization	Vertical


Mechanical Specification

Connector Type	Reverse SMA Plug (Brass)
Material	Cover(PU) / Base(PC)
Cable	--
Bushing Type	Swivel 0°, 45°, 90°
Length	108mm
Water Proof	--
Weight	11g (est.)

Environmental Specification

Operating Temp	- 20°C ~ + 65°C
Storage Temp	- 30°C ~ + 70°C
Substance	Meets RoHs requirement

E-plane

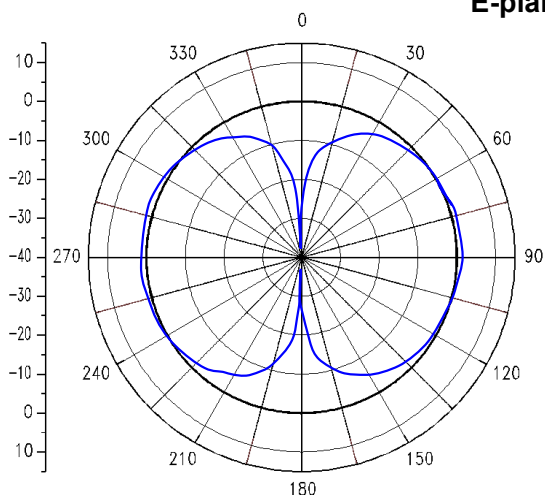

H-plane

