


Mechanical Drawing

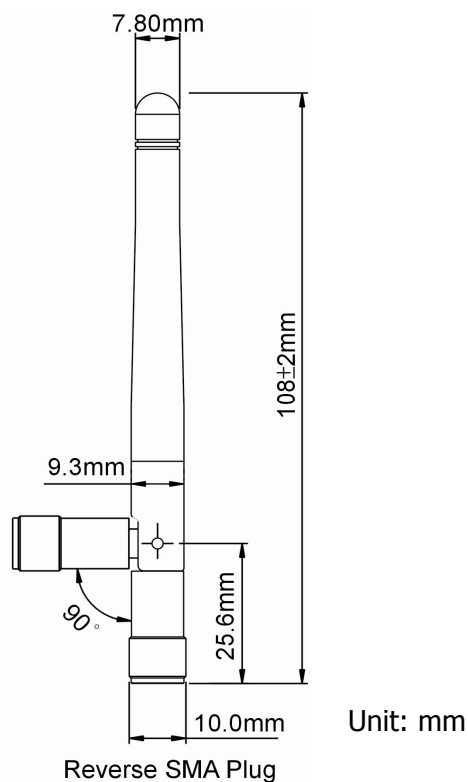

Electrical Specification


Frequency Range	2.4~2.4835GHz
Impedance	50Ω
V.S.W.R.	≤ 2.0
Radiation	Omni
Gain	2dBi
Polarization	Vertical

Mechanical Specification

Connector Type	Reverse SMA Plug (Brass)
Material	Cover(PU) / Base(PC)
Length	108mm
Bushing Type	Swivel 0°, 45°, 90°
Water Proof	IP65
Weight	9g (est.)

Environmental Specification

Operating Temp	- 20°C ~ + 65°C
Storage Temp	- 30°C ~ + 70°C
Substance	Meets RoHs requirement

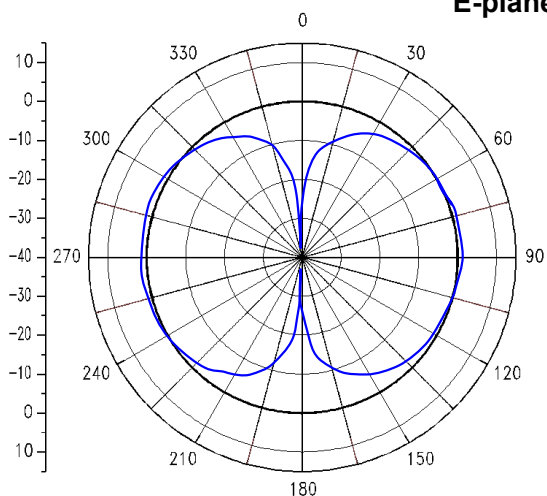E-plane

H-plane
