



Flying Lead Antenna

Model No.: E-2820-GC


Rev.

1.0

Date

Jan. 16, 2009

Mechanical Drawing

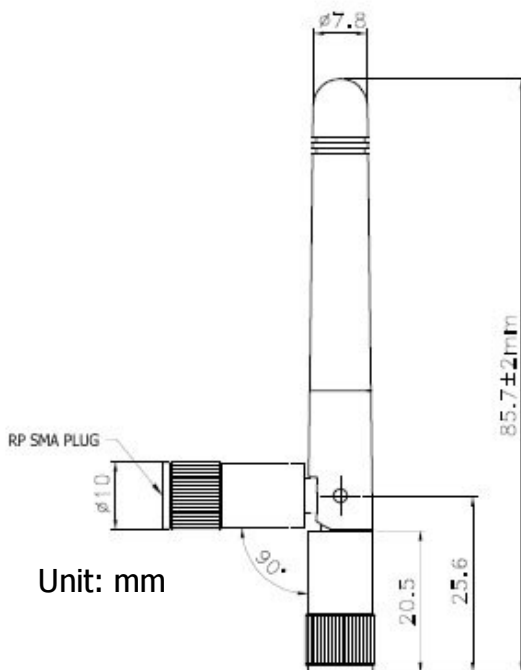

Electrical Specification

Frequency Range	2.4~2.4835GHz
Impedance	50 Ω
V.S.W.R.	≤ 2.0
Radiation	Omni
Gain	2dBi
Polarization	Vertical

Mechanical Specification

Connector Type	Reverse SMA Plug (Brass)
Material	Cover(PU) / Base(PC)
Cable	--
Bushing Type	Swivel 0°,45°, 90°
Length	85.7mm
Water Proof	--
Weight	9.5g (est.)

Environmental Specification

Operating Temp	- 20°C ~ + 65°C
Storage Temp	- 30°C ~ + 70°C
Substance	Meets RoHs requirement

